


B-16 (Beaver) is available in 3 standard working widths (125, 155 and 180 cm) and is suitable on small farms, in paddy fields and in cash crop agriculture for primary and secondary tillage.

With optional bedformer kit it is equally useful for furrowing and preparing dry-land seedbeds for vegetable farming.

Compact and lightweight - with low horsepower requirement.

Bearings and other bought-in components are sourced from renowned international manufacturers.

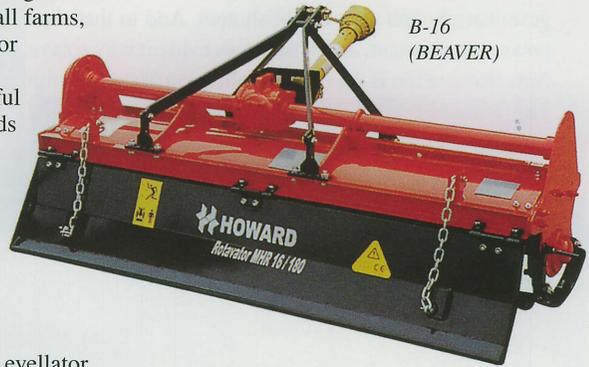


B-16
(BEAVER)

PADDY LEVELLATOR

Both B-16 and B-36 are available also with Levellator attachment- for a smooth 2nd/3rd pass finish in wet-land.

Ask for Howard's Paddy Levellator leaflet.

	B - 16		
Specifications	125	155	180
Working width, cm	125	155	180
Working depth, cm	15		
For tractor, hp	25 - 55		
3-Point Linkage, Cat.	I/II		
Universal Driveshaft	A4 w/shearbolt		
Gearbox	Single speed		
Rotor speed at 540 PTO	210 rpm		
Side drive	Chain & sprockets		
Number of Blades	30	36	42
Weight, Kg.	270	290	310

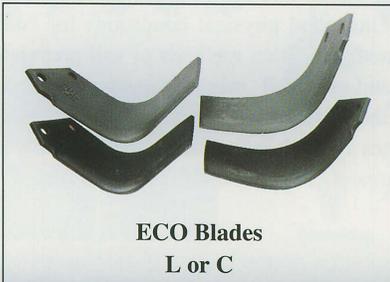

This extra-heavy-duty rotavator performs excellently in demanding conditions and is ideal for "built-on" combinations - such as Ripper, Furrower or Crumble Roller.


Side drive through heavy-duty Roller Chain - 17 ton breaking load - with externally adjustable tensioning skid. Rotor drive is supported by large ball bearings and face seals.

Protection of tractor and transmission against shock-loads ensured by heavy-duty safety clutch.

Cultivating depth is adjustable - raising/lowering the side skids.


Depth control wheels available as optional.

Selectatilt pick-off gears allow four alternative rotor speeds (540 PTO)

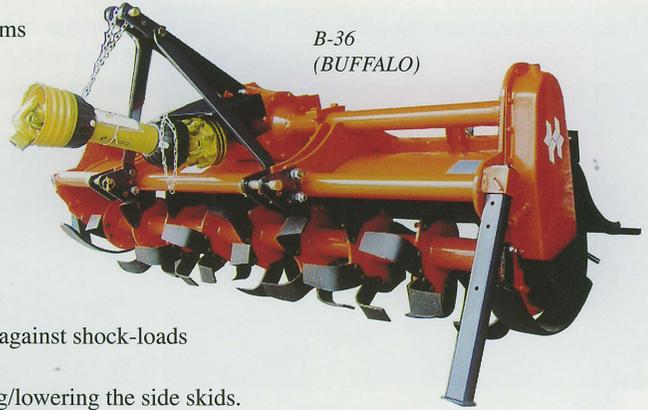


*B-36
(BUFFALO)*

Specifications	B - 36			
	180	205	230	255
Working width, cm	180	205	230	255
Working depth, cm	18			
For tractor hp	55-105			
3-Point Linkage, Cat.	I/II			
Universal Driveshaft	A8 w/FF4 Clutch			
Gearbox	Multispeed			
Rotor speed at 540 PTO	166/203/144/235rpm			
Side drive	Chain & sprockets			
Number of blades	42	48	54	60
Weight, kg.	510	550	590	630

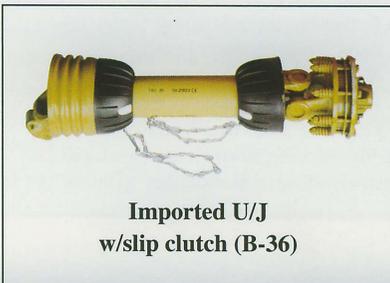

**Imported U/J
w/slip clutch (B-36)**

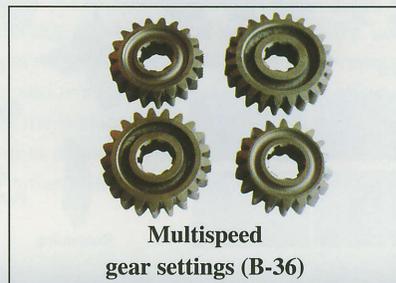

**Multispeed
gear settings (B-36)**