



For Earth, For Life
Kubota

RT

KUBOTA RICE TRANSPLANTER NSPV6CMD

Boosting rice planting with improved speed, precision and fuel-saving capabilities, The NSPV6CMD ensures performance and efficiency during the planting season.



BIGGER DIESEL ENGINE (21.6 HP)

Improved Productivity:

4.0 Ha/day

Improved Fuel Efficiency:

2.8 Litre/hr


Specifications

Model		NSPV-6CMD	
Drive type		4-wheel drive	
Machine Dimensions	Overall length (mm)	3235	
	Overall width (mm)	2220	
	Overall height (mm)	2600	
	Minimum ground clearance (mm)	500	
Weight (kg)		835	
Engine	Model	D902-E3-P-3	
	Type	Water-cooled, 4-cycle, 3-cylinder vertical type diesel engine	
	Total Displacement (L, cc)	0.898 [898]	
	Output/ Revolution speed (kW(PS)/rpm)	16.1 (21.9)/3200	
	Fuel	Diesel	
	Fuel tank capacity (L)	34	
	Starting system	Starter motor	
	Battery (V, Ah)	12, 45	
Traveling portion	Steering system	Integral power steering	
	Front wheel type	No-puncture tire	
	Front wheel OD x width (mm)	650 x 95	
	Front wheel tread (mm)	1200	
	Rear wheel type	Rubber lug wheel with thick rim	
	Rear wheel OD x width (mm)	950 x 50	
	Rear wheel tread (mm)	1200	
	Shifting system	Hydrostatic transmission HST	
Number of shifting positions		HST Main shift: Variable speeds for forward and reverse [Sub shift: 2 positions]	
Planting portion	Planting system		Rotary, forced planting
	Number of planting rows		6
	Distance between rows (cm)		30
	Hill space (cm)		*10, 12, 14, 16, 18, 21, 24
	Planting depth (cm)		1 to 5.5 [7 positions] [Reference value: 1, 1.7, 2.4, 3.2, 3.9, 4.7, 5.5]
	Number of seedlings per hill	Crossfeed distance (mm/times)	11/26, 14/20, 16/18, 18/16 [4 positions]
		Vertical taking quantity (mm)	8 to 18
Seedling condition	Seedling type	Seedling mat	
	Seedling height (cm)	8 to 25	
Number of boxes of spare seedlings		6	
Operational speed (m/s)		0 to 1.65	

The company reserves the right to change the above specifications without notice. This brochure is for descriptive purposes only.

Please contact us for warranty information.

For complete operational information, the operators manual should be consulted.

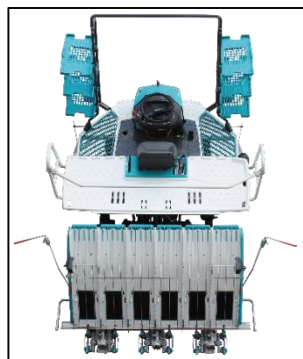

2.1m Operator Deck



2.19 HP Diesel Engine



Longer and more stable chassis (+ 185mm)




KUBOTA MALAYSIA SDN BHD

Lot 766, Jalan Subang 4, Off Persiaran Subang
Sungai Penaga Industrial Park, 47500 Subang Jaya
Selangor Darul Ehsan, Malaysia
Tel: 603-78903533

E-mail: kmsb_g.sales@kubota.com

www.kubotamalaysia.com.my

 KubotaMalaysiaSB

 Kubota Malaysia

For Earth, For Life

